





IM90Xi - IM100Xi

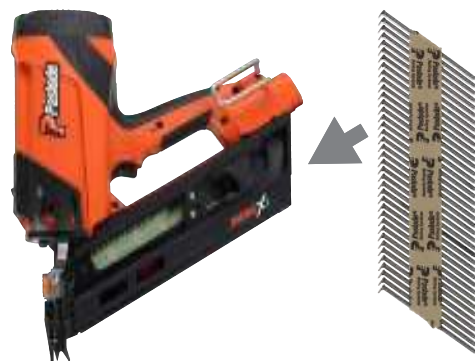

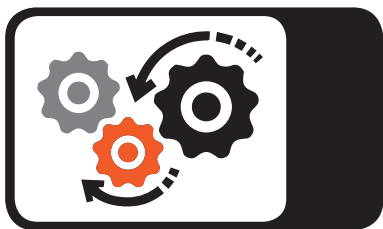

IM90Xi

Ø = 2.5 > 3.1 mm
L = 50 > 90 mm (Smooth & Ring)
RoundDrive®
34°

IM100Xi

Ø = 2.8 > 3.4 mm
L = 63 mm Ring
98 mm Uniloc
100 mm Smooth

RoundDrive®
34°



= 13 000 max



	15 min.	2 500 max.
	60 min.	10 000 max.
	90 min.	13 000 max.



25%	50%	75%	100%
○	○	○	●
○	○	●	●
○	○	●	●
○	○	●	●










0 → 300
○
○
○
○
●



-15°C	IM90Xi / IM100Xi : 1 000 /hour
≤ T ≤	IM90Xi : 4 000 /day
+49°C	IM100Xi : 3 000 /day



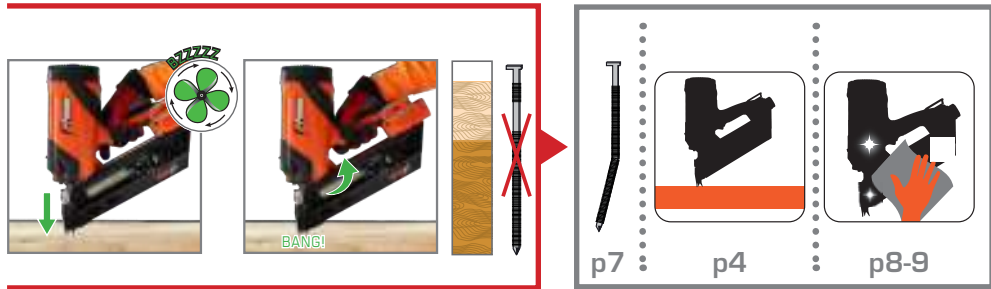




RESET



Resting position / Ruheposition / Position de repos / Ruststand /
 Posición de descanso / Posizione di riposo / Posição de descanso /
 Pozycja spoczynku / Klidová poloha / Nyugalmi állapot / Положение
 в нерабочем состоянии / Θέση αδράνειας / Hvilestilling / Viloläge
 / Hvileposisjon / Lepoasento / Položaj mirovanja / Pokojová poloha /
 Položaj mirovanja / وضع الشكون / Ramybės padėtis / Ootestasend / Miera
 stāvoklis / Hvíldarstaða



Notes

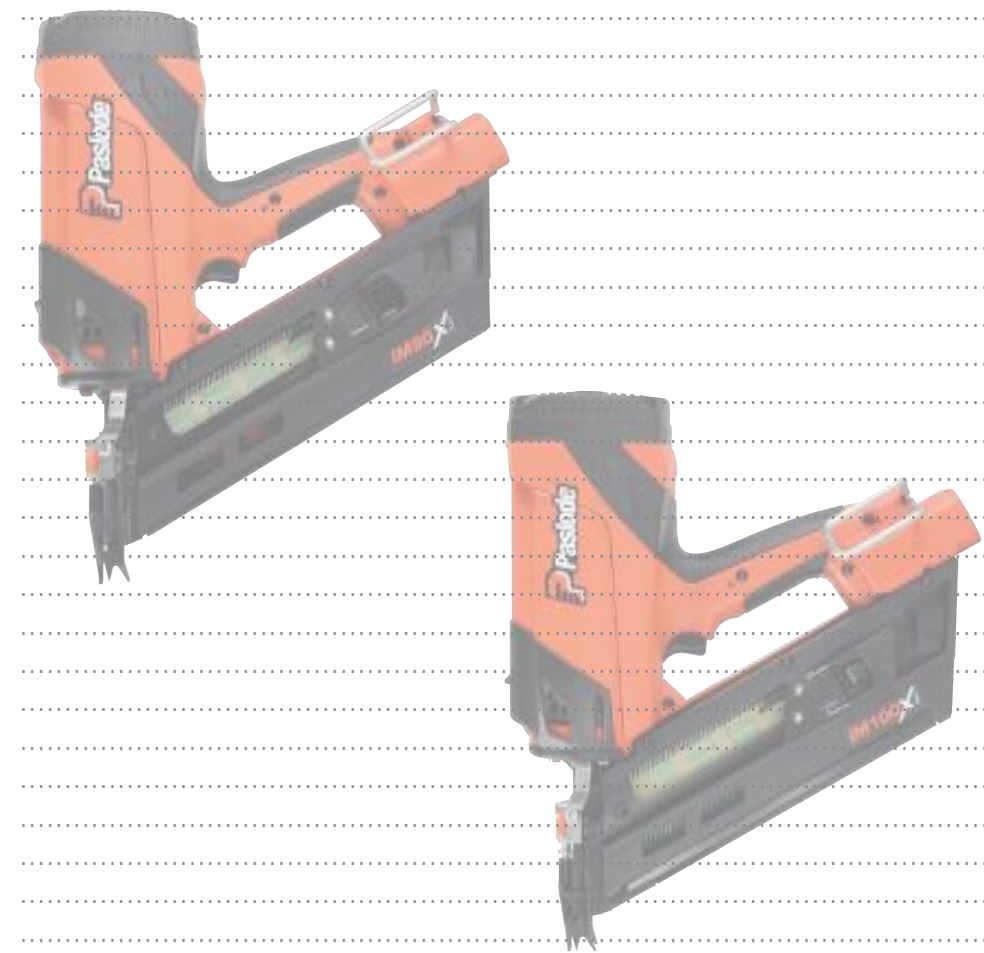



Route de Lyon F-26500 Bourg-lès-Valence

019690-1
02/2020